creo concept

PERFECT WALL

creo concept

PERFECT WALL

Contents

PURE	2
SILENCE	9
ULTRA SILENCE	17
PURE LOFT	26
SILENCE LOFT	33
ULTRA SILENCE LOFT	42
FIRE RESISTANT WALLS	49
DOOR 53	53
STANDARD DOOR	56
TEMPERED GLASS DOOR	60
FD53 FLUSH DOOR	64
WOODEN DOOR	68
DETAILS	71

Ladies and Gentlemen,

The past 10 years of activity of CreoConcept consist of numerous exciting realizations and passionate projects, in which our products have been used.

Perfect aesthetics, high acoustic performance, and very high quality are the significant features of our products, which provide the user the sense of comfort and impact the high efficiency of work of the office building employees. It is the satisfaction of our Customers that is the most important for us.

We understand, that our organisation has to follow the constantly changing business environment and new requirements of dynamically developing companies. Therefore we would like to direct your attention also to other aspects of the activity led by CreoConcept, such as: realisation of goals concerning sustainable construction through usage of full recycling of all the waste, using energy efficient machines and devices in the production process, optimalisation of delivery of materials to construction sites in Poland through combining individual deliveries into single shipments.

We hereby present to you this catalogue with the most interesting examples and ideas for arrangement of space for work, at the same time hoping, you will regard our products as interesting and inspiring.

Yours sincerely,

Tomasz Rybka
CEO - CreoConcept

PURE

PURE is the high class transomless system of partition walls allowing for innovative and transparent ways of office space management. Using minimal quantity of aluminium introduces more light and reflects ultramodern trends. Partition walls and sliding door made entirely of glass cause the lines to become softened and cause the office space to become maximally illuminated.

PURE

Specification

- Removable 22 mm thick aluminium construction.
- Maximum height of construction: 3000 mm.
- Aluminium profiles: silver anodised and powder coated according to RAL colour pallete.
- Ceiling U profiles and open floor profiles: 22 x 25 mm for the 10mm and 12 mm thick glass.
- Glass panels joined together using a doublesided adhesive tape or microprofile.
- Walls made of laminated safety glass or tempered glass with polished edges from 10 mm to 12 mm.
- Possibility of placement of light switches on the framing profile.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing	VSG laminated safety glass	55.1	Rw= 33 dB
Full height glazing	VSG laminated safety glass	66.1	Rw =34 dB
Full height glazing	VSG laminated safety glass	55.2 Si	Rw = 36 dB
Full height glazing	VSG laminated safety glass	66.2 Si	Rw = 38 dB

Standard door

Laminated, veneered or painted in any colour from the RAL palette - wooden door, 40 mm thick. Acoustic insulation Rw 32dB or Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8 mm or 10 mm thick tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB.

Swinging door

10 mm or 12 mm thick tempered glass, door leaf on point fittings with floor spring door closer.

Sliding door

Door leaf made of 8mm, 10mm or 12mm tempered glass. Door is not rated in terms of acoustic insulation.

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB

P0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette

P0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



P0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



P0013

Doorframe profile	
Material:	Aluminium
Standard length:	6300mm
Colour:	Any colour from the RAL palette



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



P0003

30 MM Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0003

OMEGA FOR 30MM PROFILES	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



P0014

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



KU00A

DOORFRAME COVER PLATE FOR P0014	
Material:	Aluminium
Standard length:	6500mm
Colour:	Black / Gray

Horizontal section
PURE

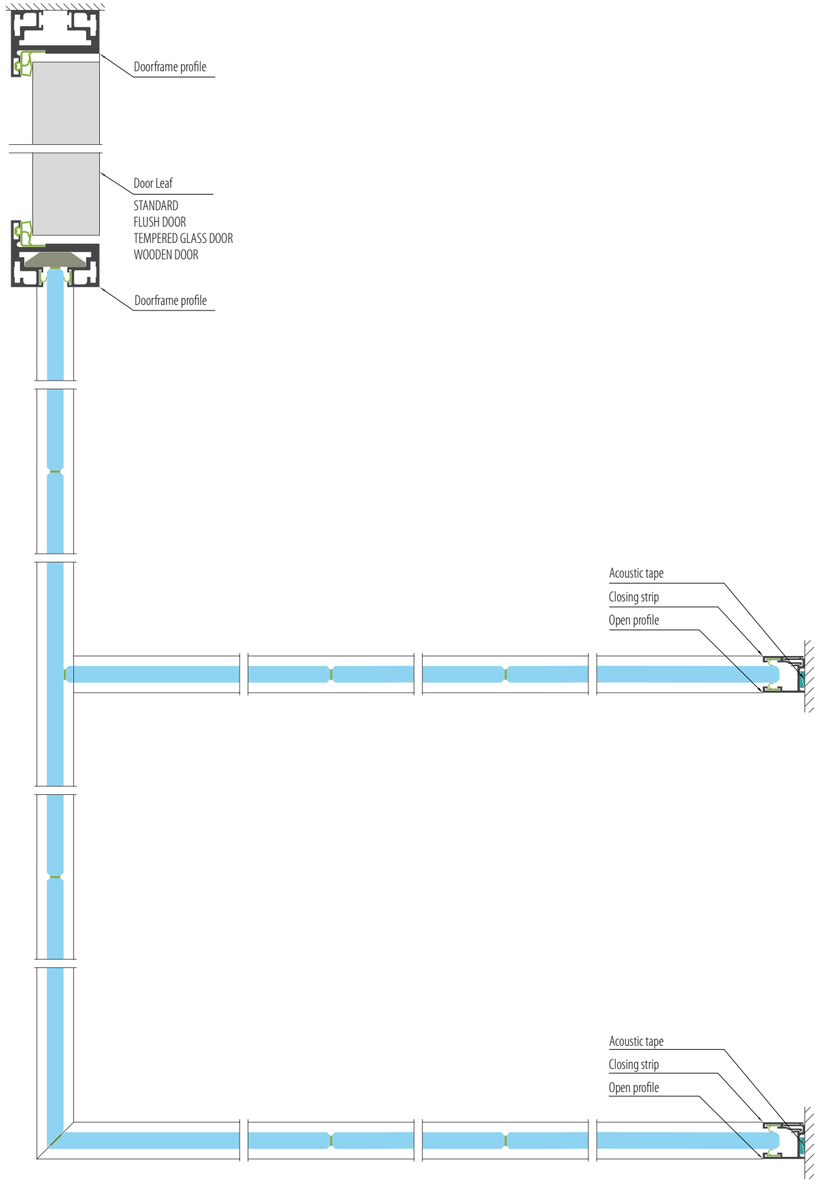

Vertical section
PURE

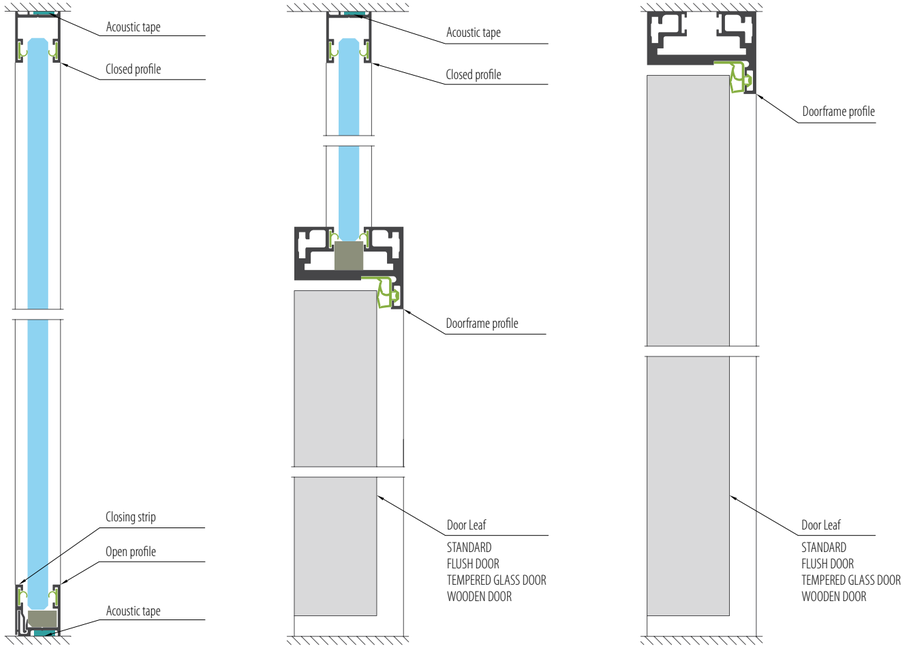

SILENCE

Constantly following the development of technology we would like to present the transomless system of partition walls - SILENCE, which guarantees maximum variety of different room arangements and lots of natural daylight in the room while keeping the high acoustic parameters (up to Rw 47dB ITB certificate). Doubleglazing SILENCE system is characterized by original design, and allows for outstanding solutions in terms of creation of office space.

SILENCE

Specification

- Removable 78 mm thick aluminium construction.
- Maximum height:3200 mm.
- Aluminium profiles powder coated in any colour from RAL pallete.
- Ceiling and floor panels with 25mm height.
- Single and Double glazed profiles.
- Glass panels joined together using doublesided adhesive tape or microprofiles.
- Doorframe profile: open or closed profiles. Cylindrical hinges fixed on the edge of the door.
- Electric profiles for integration of cables - for light switches and household sockets.
- Glass walls - single or double glazed: laminated or tempered glass, from 5 to 12 mm thick.
- Possibility of application of decorative films, manual or electric blinds.
- Possibility of placement of light switches on the framing profile.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing | VSG laminated safety glass	55.1+12 mm ESG	Rw = 43 dB
Full height glazing | VSG laminated safety glass	55.2+66.2	Rw = 45 dB
Full height glazing | VSG laminated safety glass	55.2 Si+66.2Si	Rw= 47 dB

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw 32dB lub Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm thick tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Sliding door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Door is not rated in terms of acoustic insulation.

Glass door in aluminium frame, single or double glazed. Door is not rated in terms of acoustic insulation.

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB



S0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0003 (S0007)

Double glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0004

Post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



S0005

End cap	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



S0006 (S0009)

Single glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



KU00A

Doorframe cover plate	
Material:	Plastic
Standard length:	6500mm
Colour:	Black / Gray



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0012

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



S0020

Corner post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



M0004

OMEGA	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette

Horizontal section
SILENCE

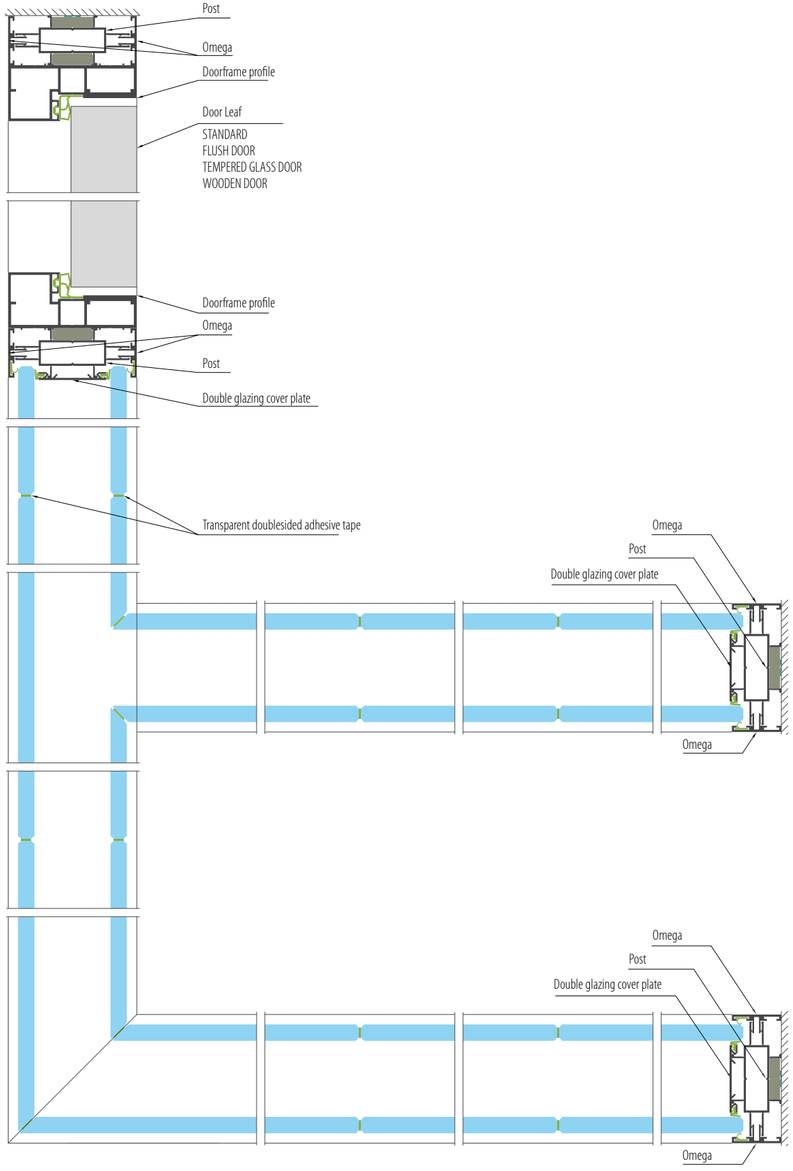

Vertical section
SILENCE

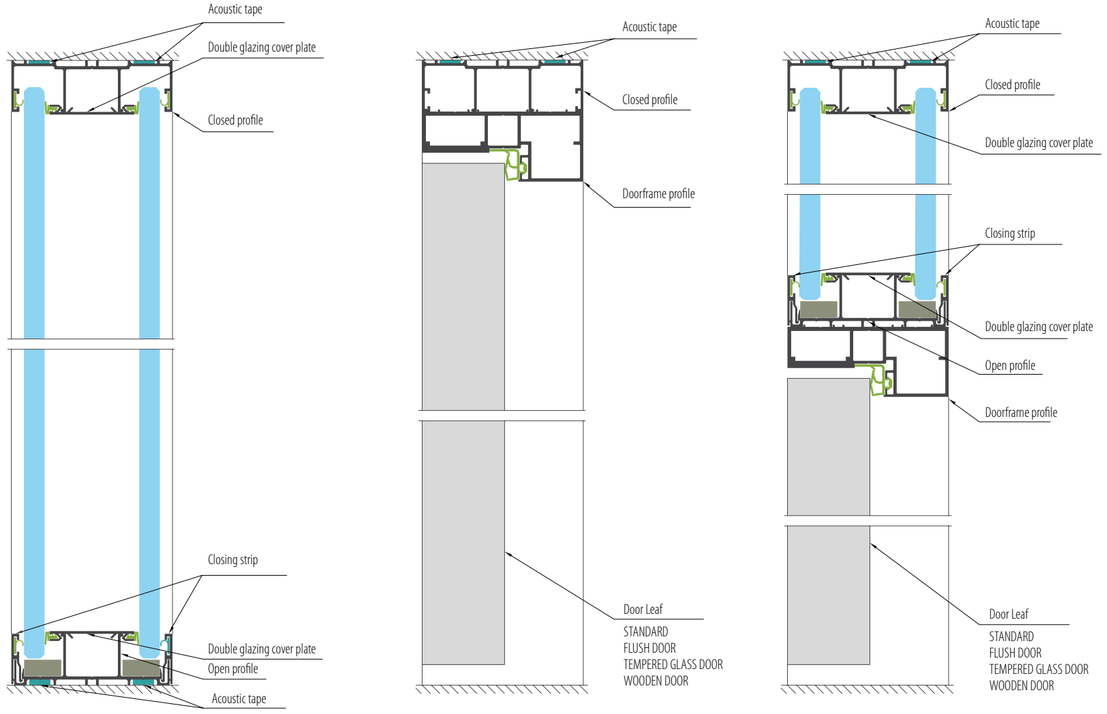

ULTRA SILENCE

The transomless system of partition walls ULTRA SILENCE, which allows for ideal freedom of arrangement and maximum access of daylight to the office space, simultaneously keeps achieving high acoustic paramenters (up to Rw 48dB ITB certificate). ULTRA SILENCE is a double glazed system with original design, which enables achievement of office environments, which ideally fulfill the requirements of their users.

ULTRA SILENCE

Specification

- Removable 100 mm thick aluminium construction.
- Maximum height:3200 mm.
- Aluminium profiles powder coated in any colour from RAL pallete.
- Ceiling and floor profiles 25 mm high.
- Single and double glazed profiles.
- Glass panels joined together using doublesided adhesive tape or microprofiles.
- Doorframe profiles: open or closed profiles. Cylindrical hinges mounted on the edge of a door.
- Electric profiles for integration of cables for light switches and household sockets.
- Glass walls - single or double glazed: laminated or tempered glass, from 5 to 12 mm thick.
- Possibility of application of decorative films, manual or electric blinds.
- Possibility of placement of light switches on the framing profile.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing | VSG laminated safety glass	55.1 + 10 mm ESG	Rw = 44 dB
Full height glazing | VSG laminated safety glass	55.2 Si + 66.2 Si	Rw = 48 dB

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw 32dB lub Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm thick tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB.

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Sliding door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Door is not rated in terms of acoustic insulation.

Glass door in aluminium frame, single or double glazed. Door is not rated in terms of acoustic insulation.

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB



U0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



U0012

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



U0003

Double glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0004

Post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



KU00A

Doorframe cover plate	
Material:	Plastic
Standard length:	6500mm
Colour:	Black / Gray



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0004

OMEGA	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette

Horizontal section

ULTRA SILENCE

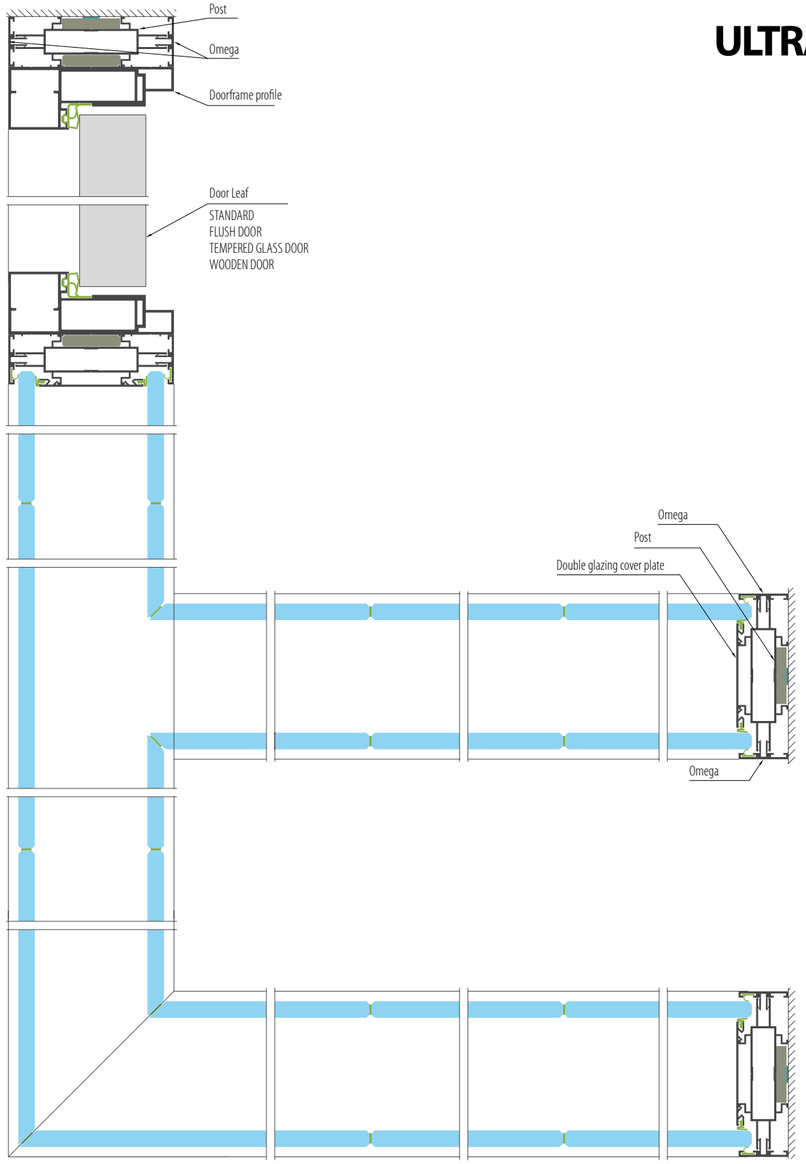

Vertical section

ULTRA SILENCE

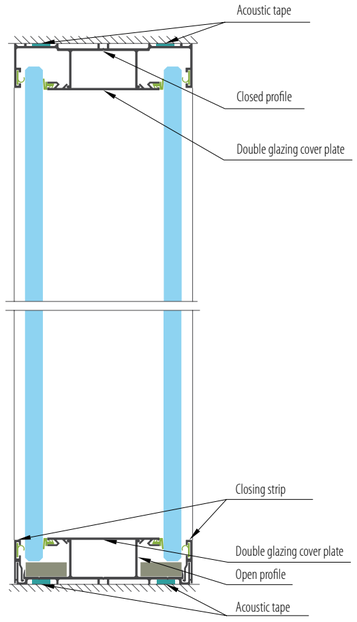

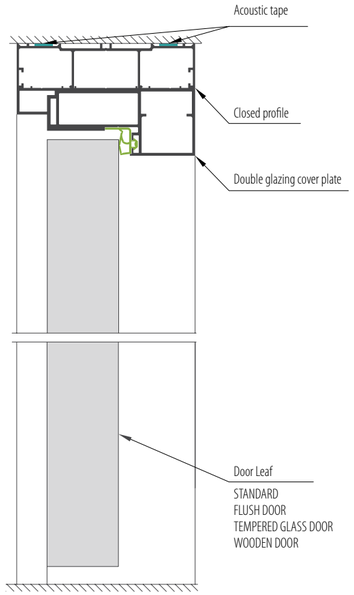

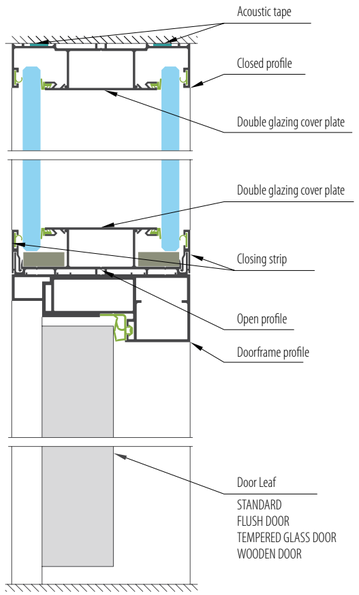

PURE LOFT

Pure Loft draws attention due to a simple and modern design. Simple implementation, modularity and attractive price contribute to optimization of office space. Due to wide configuration options you will easily adapt the open space area to the requirements of the office environment.

PURE LOFT

Specification

- Removable 22 mm thick aluminium construction.
- Maximum height: 3000 mm.
- Aluminium profiles: silver anodized or powder coated according to RAL colour pallette.
- Configuration options: glazed on full height, transom bars both horizontal and vertical.
- Ceiling profiles U and I shaped, 22x25 mm open floor profiles.
- Possibility of placement of light switches on the framing profile.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing	VSG laminated safety glass	55.1	Rw= 33 dB
Full height glazing	VSG laminated safety glass	66.1	Rw =34 dB
Full height glazing	VSG laminated safety glass	55.2 Si	Rw = 36 dB
Full height glazing	VSG laminated safety glass	66.2 Si	Rw = 38 dB

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw 32dB or Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB.

Swinging door

10 mm or 12 mm tempered glass , door leaf on point fittings with a floor spring door closer.

Sliding door

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB

P0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette

P0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



P0003

30 MM Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0003

OMEGA	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



P0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



P0013

Doorframe profile	
Material:	Aluminium
Standard length:	6300mm
Colour:	Any colour from the RAL palette



P0014

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



KU00A

Doorframe cover plate	
Material:	Aluminium
Standard length:	6500mm
Colour:	Black / Gray

Horizontal section
PURE LOFT

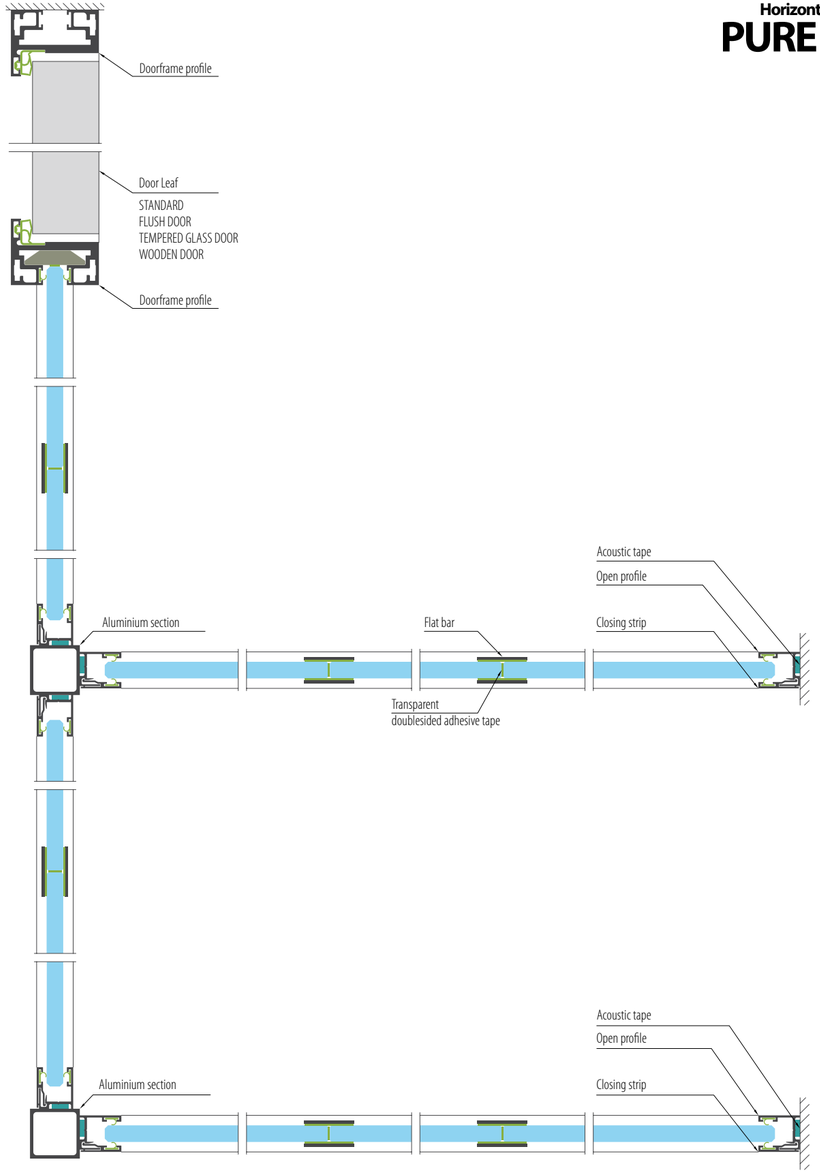

Vertical section
PURE LOFT

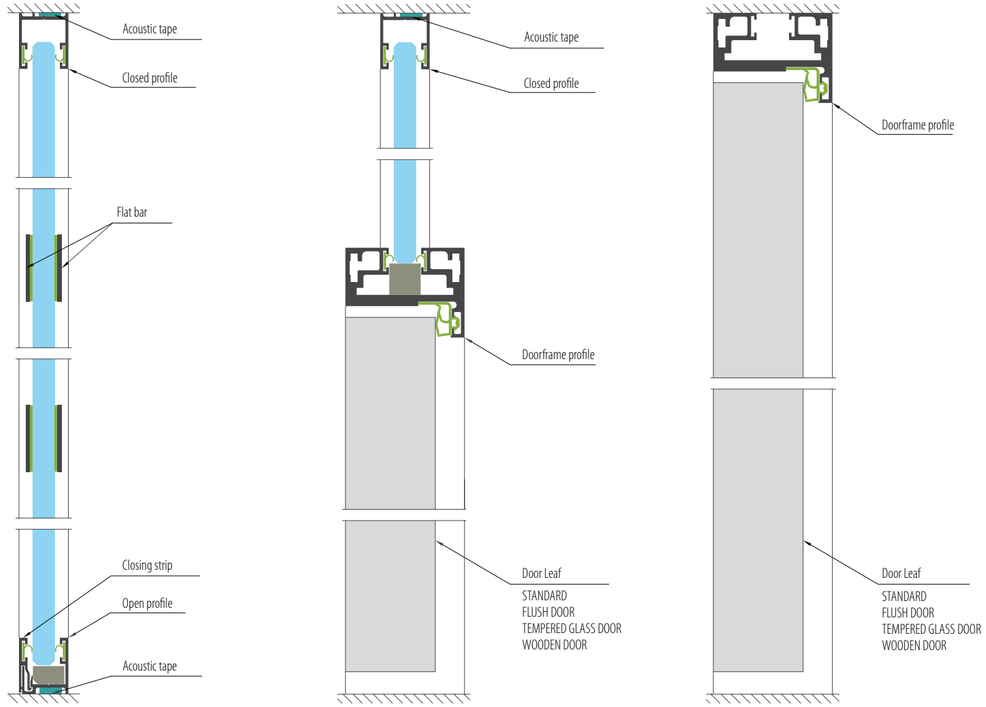

SILENCE LOFT

On the market of partition walls SILENCE LOFT System attracts attention due to simple and modern design.Easy implementation, modularity and attractive price contribute towards an optimal office space enviroment. The play of colours and light of the materials combine to create genuine working environments.

SILENCE LOFT

Specification

- Removable 78 mm thick aluminium construction.
- Maximum height:3600 mm.
- Aluminium profiles powder coated in any colour from RAL pallete.
- Configuration options: full height solid or full-height glazed, glazed above dado panel, glazed at door height, multi-transoms, etc.
- Ceiling and floor profiles 25mm high.
- Single and double glazed profiles, made of aluminium.
- Doorframe Profile: open or closed profiles. Cylindrical hinges mounted on the edge of a door.
- Corner profiles right angle square shaped, closed T angle profile.
- Electric profiles for integration of cables for llight switches and household sockets.
- Possibility of placement of light switches on the framing profile.
- Solid panels: 13mm Gypsum Cardboard covered by a vinyl wall paper, 12mm MDF board covered by melamine, laminate or veneer with a 45mm acoustic layer of mineral wool.
- Glass sections - single or double glazing: laminated or tempered glass from 5 mm to 12 mm thick.
- Possibility of application of decorative films, manual or electric blinds.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing | VSG laminated safety glass	33.1 + 33.1	Rw = 40dB.
Full height glazing | VSG laminated safety glass	33.1 + 55.1	Rw = 43dB.
Full height glazing | VSG laminated safety glass	55.1 + 66.1	Rw = 44dB.
Full height glazing | VSG laminated safety glass	33.1 + 66.2 Si	Rw = 45dB.
Full height glazing | VSG laminated safety glass	55.2 Si + 66.2 Si	Rw = 48dB.

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw 32dB or Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Sliding door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Door is not rated in terms of acoustic insulation.

Glass door in aluminium frame, single or double glazed. Door is not rated in terms of acoustic insulation.

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB



S0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



S0012

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



S0003 (S0007)

Double glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



S0004

Post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



KU00A

Doorframe cover plate	
Material:	Plastic
Standard length:	6500mm
Colour:	Black / Gray



S0020

Corner post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



S0005

End cap	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



S0006 (S0009)

Single glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0004

OMEGA	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette

Horizontal section
SILENCE LOFT

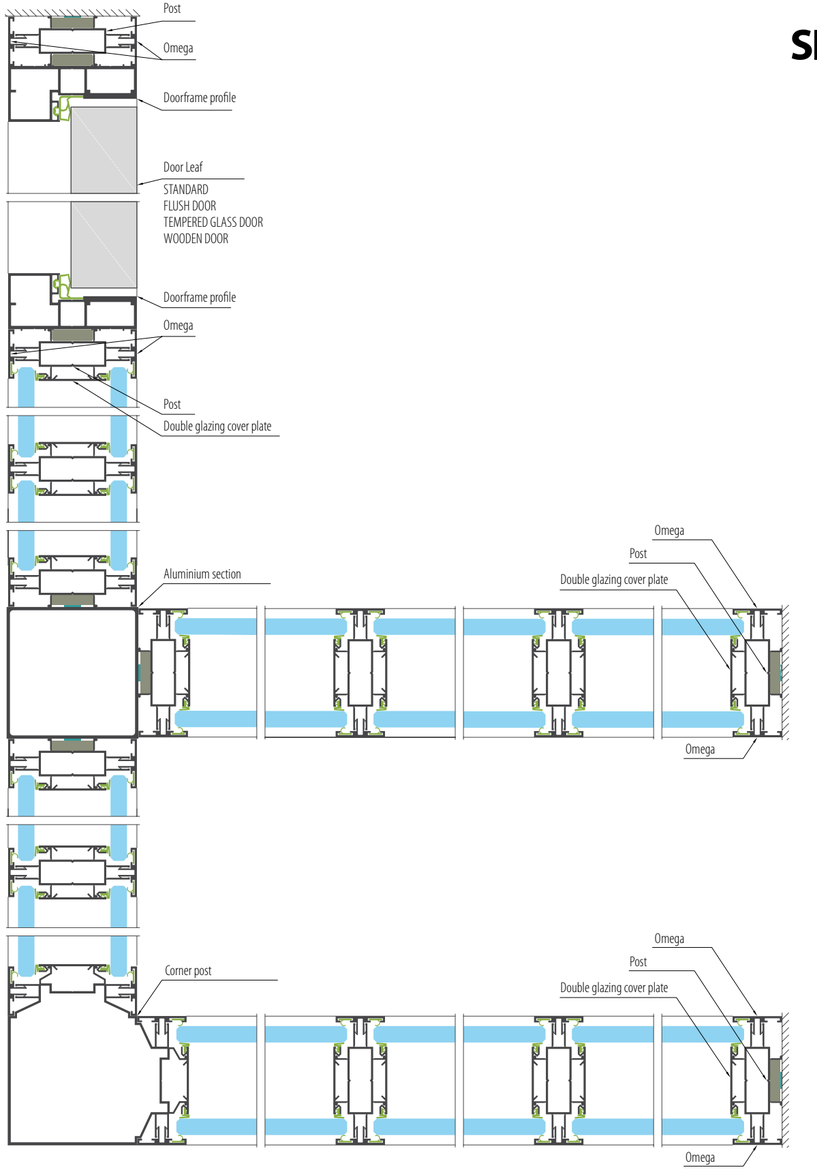

Vertical section
SILENCE LOFT

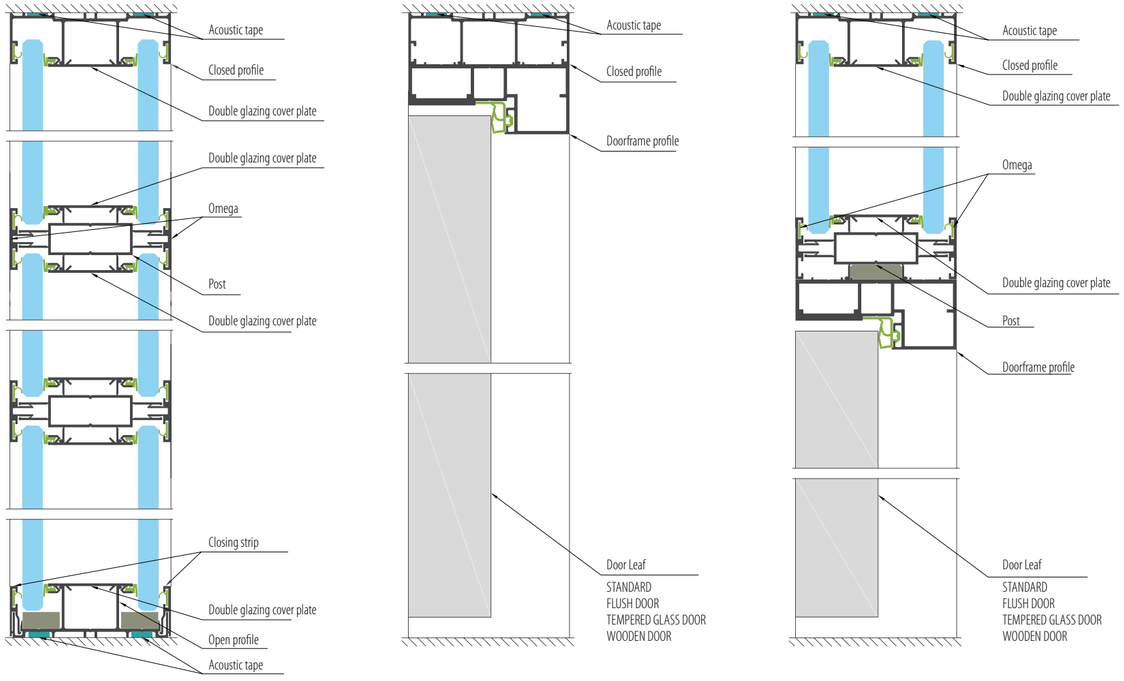

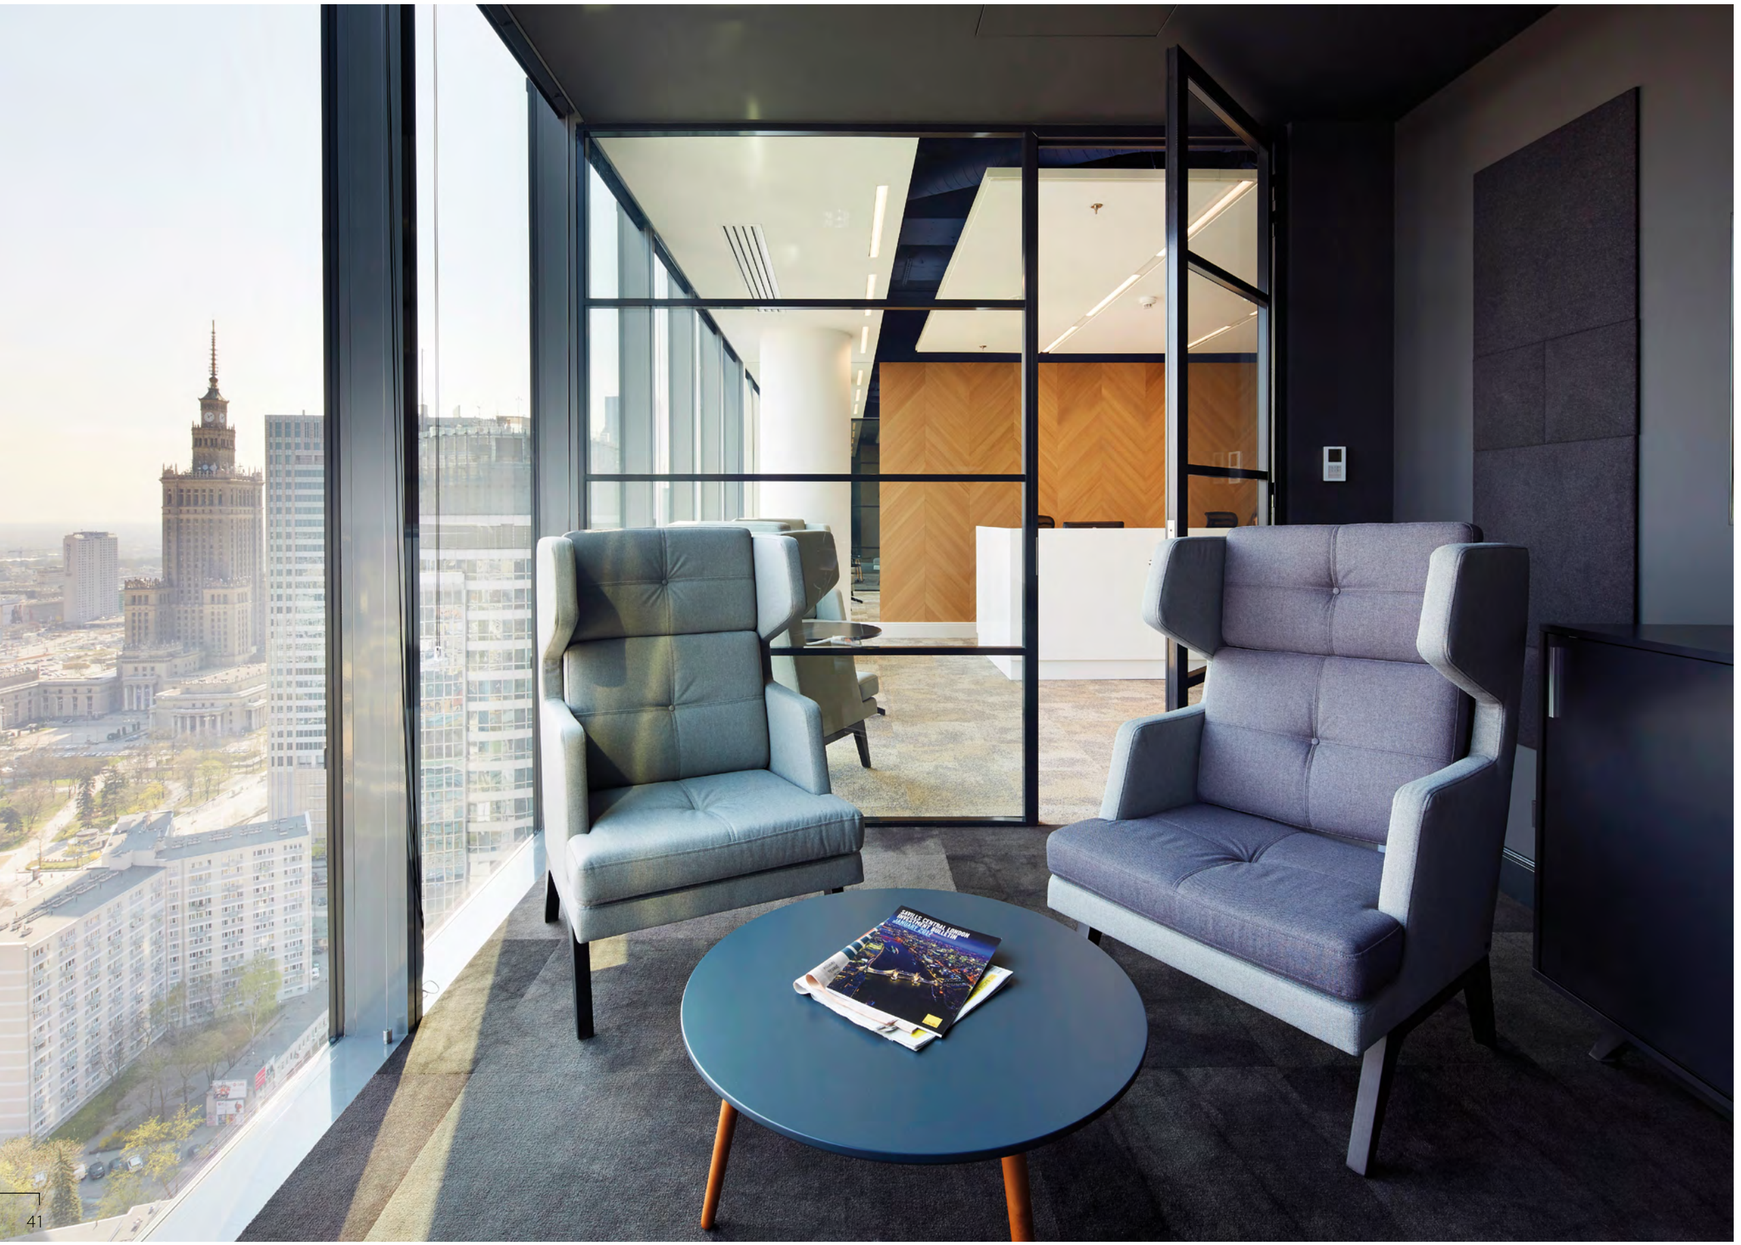

ULTRA SILENCE LOFT

While preserving the contemporary aspect of SILENCE LOFT, ULTRA SILENCE LOFT System meets the requirements of high performance soundproofing performance and the possibility of adaptation to high storeys.

ULTRA SILENCE LOFT

Specification

- Removable 100 mm thick aluminium construction.
- Maximum height: 3600 mm.
- Aluminium profiles powder coated in any colour from RAL pallete.
- Configuration possibility: full height solid or full-height glazed, glazed above dado panel, glazed at door height, multi-transoms, etc.
- Ceiling or floor profiles 25 mm high.
- Single or double glazed profiles, made of aluminium.
- Doorframe Profile: open or closed profiles. Cylindrical hinges mounted on the edge of a door.
- Corner profiles right angle - square, closed T angle profile.
- Electric profiles for integration of cables for light switches and household sockets.
- Solid panels: 13mm Gypsum cardboard covered by vinyl wallpaper, 12mm MDF plate covered with melamine, laminate or veneer with a 75mm layer or acoustic mineral wool.
- Glass sections - single or double glazed: laminated or tempered glass, from 5mm to 12 mm thick.
- Possibility of application of decorative films, manual or electric blinds.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing | VSG laminated safety glass	33.1+33.1	Rw= 40 dB
Full height glazing | VSG laminated safety glass	33.1+55.1	Rw = 43 dB
Full height glazing | VSG laminated safety glass	55.1+66.1	Rw = 44 dB
Full height glazing | VSG laminated safety glass	33.1+66.2 Si	Rw = 45 dB
Full height glazing | VSG laminated safety glass	55.2 Si + 66.2 Si	Rw = 48 dB

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw 32dB or Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB.

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Sliding door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Door is not rated in terms of acoustic insulation.

Glass door in aluminium frame, single or double glazed. Door is not rated in terms of acoustic insulation.

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB



U0001

Open profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0002

Closed profile	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0010

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



U0012

Doorframe profile	
Material:	Aluminium
Standard length:	6500mm
Colour:	Any colour from the RAL palette



U0003

Double glazing cover plate	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



U0004

Post	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette



KU00A

Doorframe cover plate	
Material:	Plastic
Standard length:	6500mm
Colour:	Black / Gray



M0001

Closing strip	
Material:	Aluminium
Standard length:	6000mm
Colour:	Any colour from the RAL palette



M0004

OMEGA	
Material:	Aluminium
Standard length:	5700mm
Colour:	Any colour from the RAL palette

Horizontal section

ULTRA SILENCE LOFT

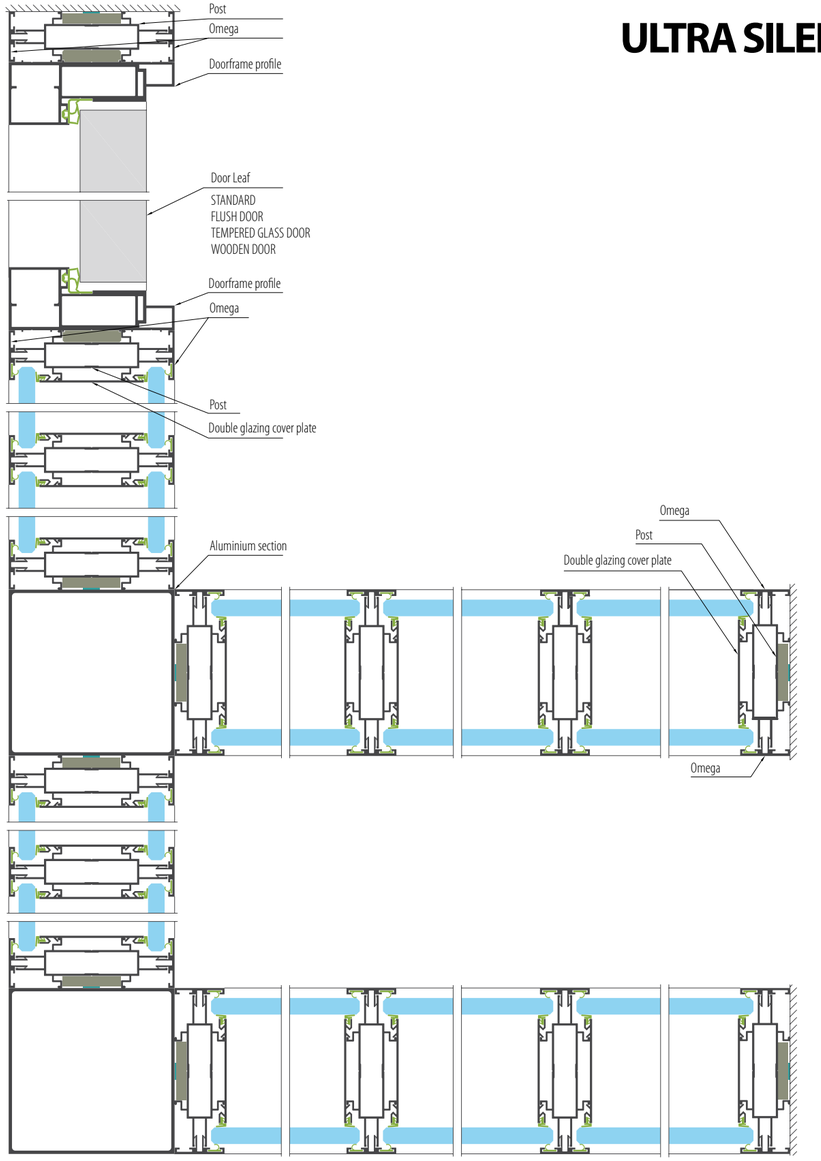

Vertical section

ULTRA SILENCE LOFT

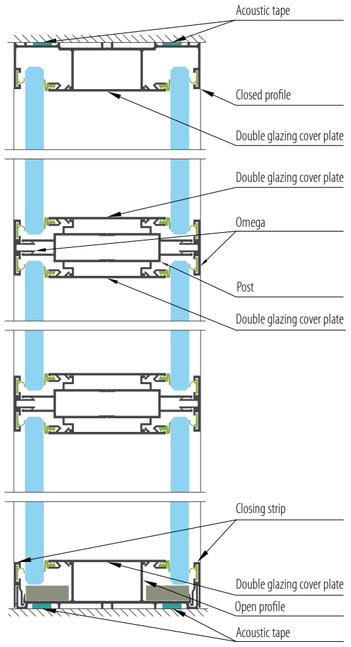

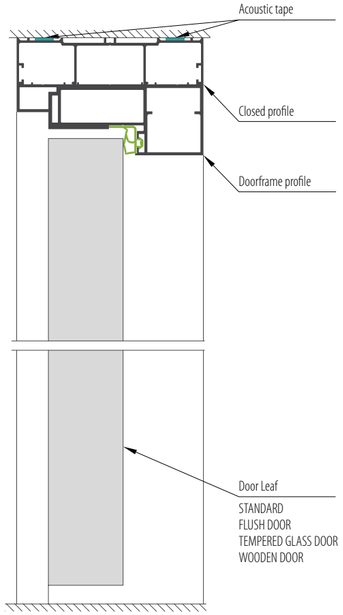

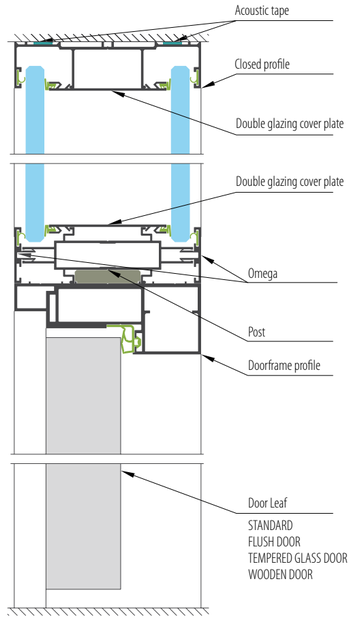

FIRE RATED WALLS

Fire rated systems offered by CreoConcept provide an extensive range of various kinds of elements of the building, responsible for organization of i.e. “fire zones” in the buildings and help secure appropriate conditions for evacuation of people. Fire resistance of those kinds of elements, depending on the requirements can achieve the level of performance matching classess from EI15 up to EI120 for vertical constructions. In case of such requirement, fire rated door can also be fitted with additional elements to provide smoke proof performance.

FIRE RATED WALLS

Specification

- Removable 78 mm or 118 mm thick aluminium construction with thermal separators.
- Maximum height of 3600 mm.
- Aluminium profiles powder coated in any colour from RAL pallete.
- Configuration options: full height solid or full-height glazed, glazed above dado panel, glazed at door height, multi-transoms, etc.
- Floor and ceiling profiles 61 mm high.
- Doorframe Profile: open or closed profiles. Cylindrical hinges mounted on the edge of a door.
- Corner profiles right angle, square.
- Possibility of placement of light switches on the framing profile.
- Glass sections – single or double glazed.
- Possibility of installation of walls in two options - with transoms or transomless.

Acoustics

Glass wall	Glazing	Acoustic insulation Rw
Full height glazing | VSG laminated safety glass	17 mm	Rw = 38 dB
Full height glazing | VSG laminated safety glass	23 mm	Rw = 42 dB
Full height glazing | VSG laminated safety glass	30 mm	Rw = 45 dB

Standard door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Acoustic insulation Rw32dB or Rw 37dB.

Glass door in aluminium frame, single or double glazed. Acoustic Insulation Rw 34dB, Rw 35dB, Rw 37dB and Rw 38dB.

Tempered glass door made of 8mm or 10mm thick tempered glass. Acoustic insulation Rw 20dB, Rw 30dB and Rw 34dB.

FD53 FLUSH DOOR

Double glazed door transparent or non-transparent with an invisible aluminium frame, 53 mm thick. Acoustic insulation Rw 36dB or Rw 41dB.

Fire Rated Door

Single or double glazed door leaf with fireproof fill allowing for reaching of EI15, EI30, EI60 fire resistance classes.

Sliding door

Laminated, veneered or painted in any colour from RAL pallette wooden door, 40 mm thick. Door is not rated in terms of acoustic insulation.

Glass door in aluminium frame, single or double glazed. Door is not rated in terms of acoustic insulation.

Door leaf made of tempered glass 8mm, 10mm or 12mm thick. Door is not rated in terms of acoustic insulation.

Door Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB
Tempered glass door	10 mm ESG	10 mm	34 dB
Wooden door	-	40 mm	32 dB, 37 dB

DOOR

Creo Concept systems feature a wide range of available solutions in terms of door types. We suggest the following solutions depending on the aesthetic and acoustic requirements:

- STANDARD DOOR in aluminium frame
- TEMPERED GLASS DOOR
- FD53 FLUSH DOOR
- WOODEN DOOR

STANDARD DOOR
IN AN ALUMINIUM FRAME

STANDARD door in an aluminium frame, single or double glazed. Possibility of fitting a door closer and access control devices. Aluminium doorframe 53 mm, 78 mm, 100 mm thick. Width of the doorframe: 35 mm, 38 mm, 40 mm.

Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Standard	44.2	8,76 mm	34 dB
Standard	55.1	10,38 mm	35 dB
Standard	66.2 Si	12,76 mm	37 dB
Standard	33.2/18mm/33.2	31,6 mm	36 dB
Standard	44.2 Si/16 mm/VSG 33.2	31,5 mm	38 dB

For all the door, the results listed in the table have been achieved due to use of automatic drop seals.

Vertical section

DRZWI STANDARD

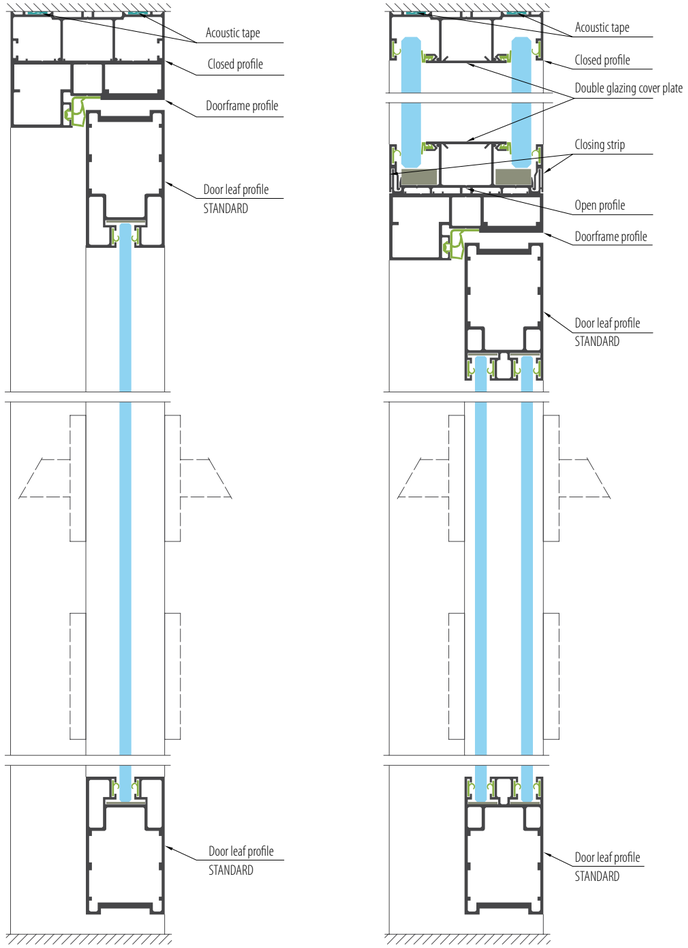

Horizontal section

DRZWI STANDARD

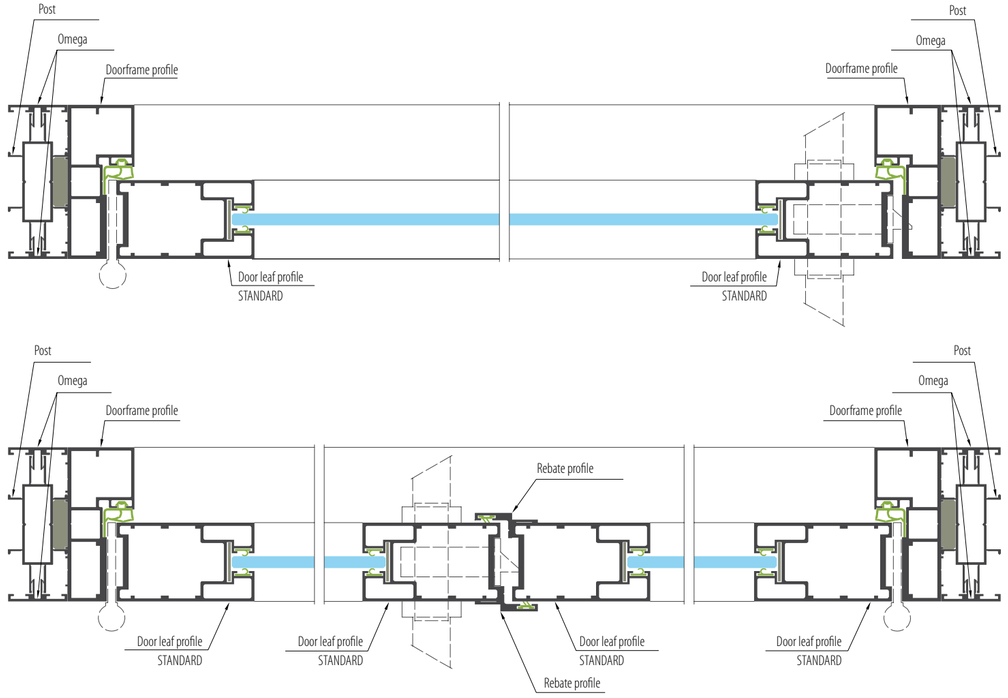

Business Link Astoria
premium class office

TEMPERED GLASS DOOR

Tempered glass door, frameless, 8mm or 10mm thick made of tempered glass. Possibility of fitting a door closer with rail and access control devices.. Aluminium doorframe 53 mm, 78mm or 100 mm wide. Doorframe width 35 mm, 38 mm, 40 mm.

Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Tempered glass door	8 mm ESG	8 mm	20 dB
Tempered glass door with an automatic drop seal.	10 mm ESG	10 mm	30 dB, 34 dB

For all the door, the results listed in the table have been achieved due to use of automatic drop seals. door bottom seals.

Vertical section

TEMPERED GLASS DOOR

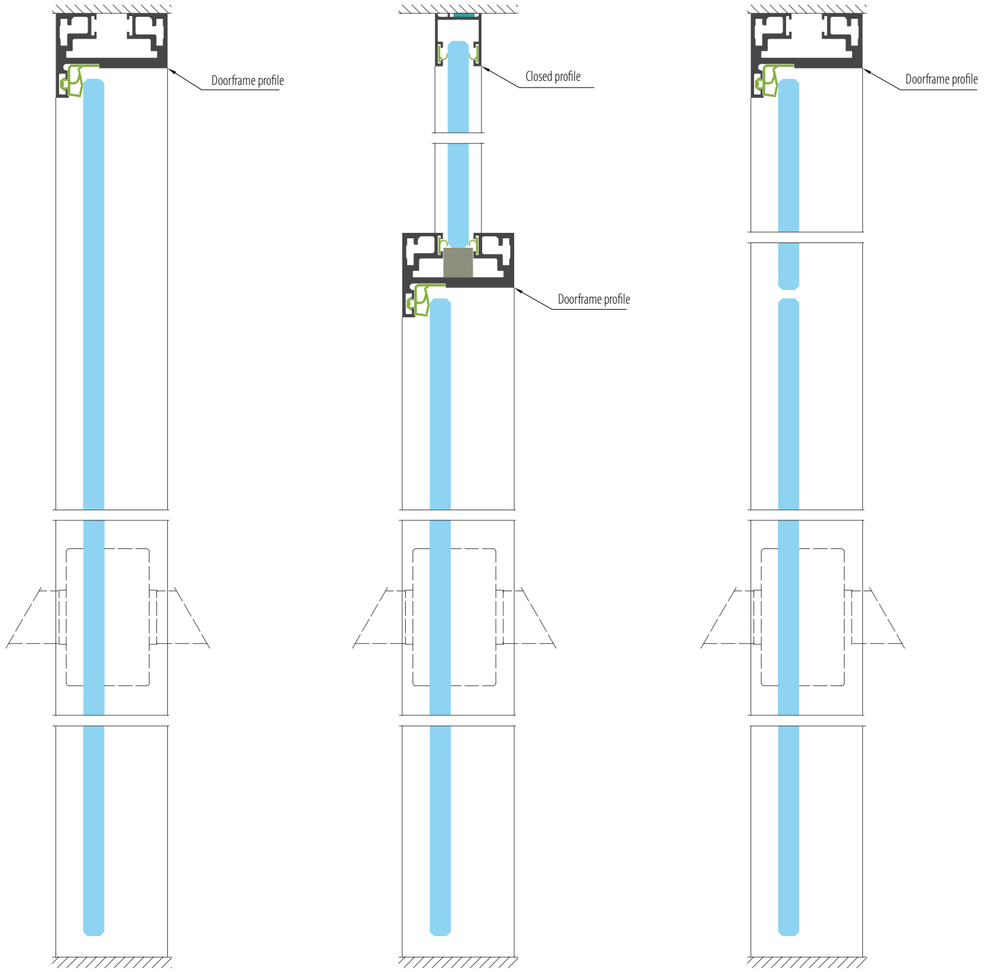

Horizontal section

TEMPERED GLASS DOOR

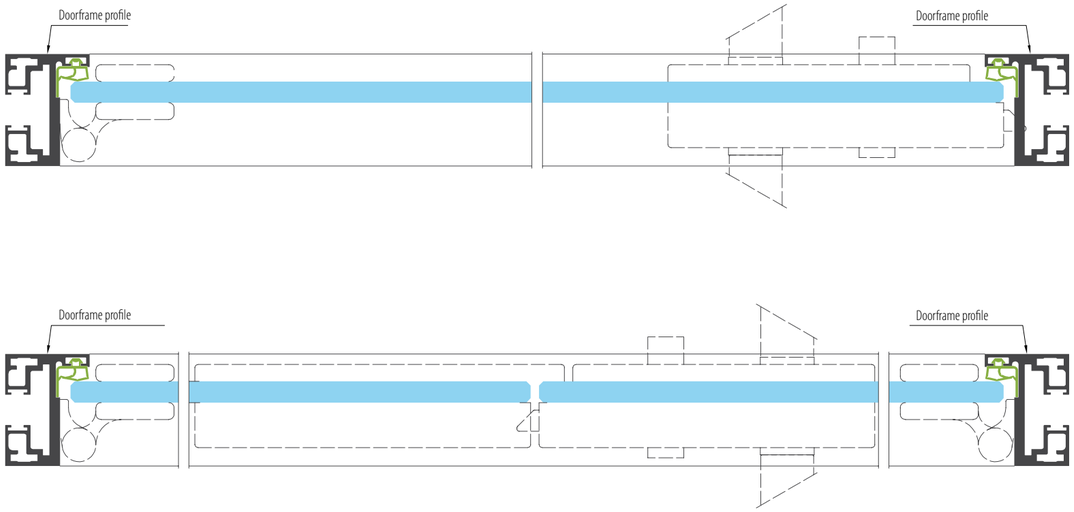

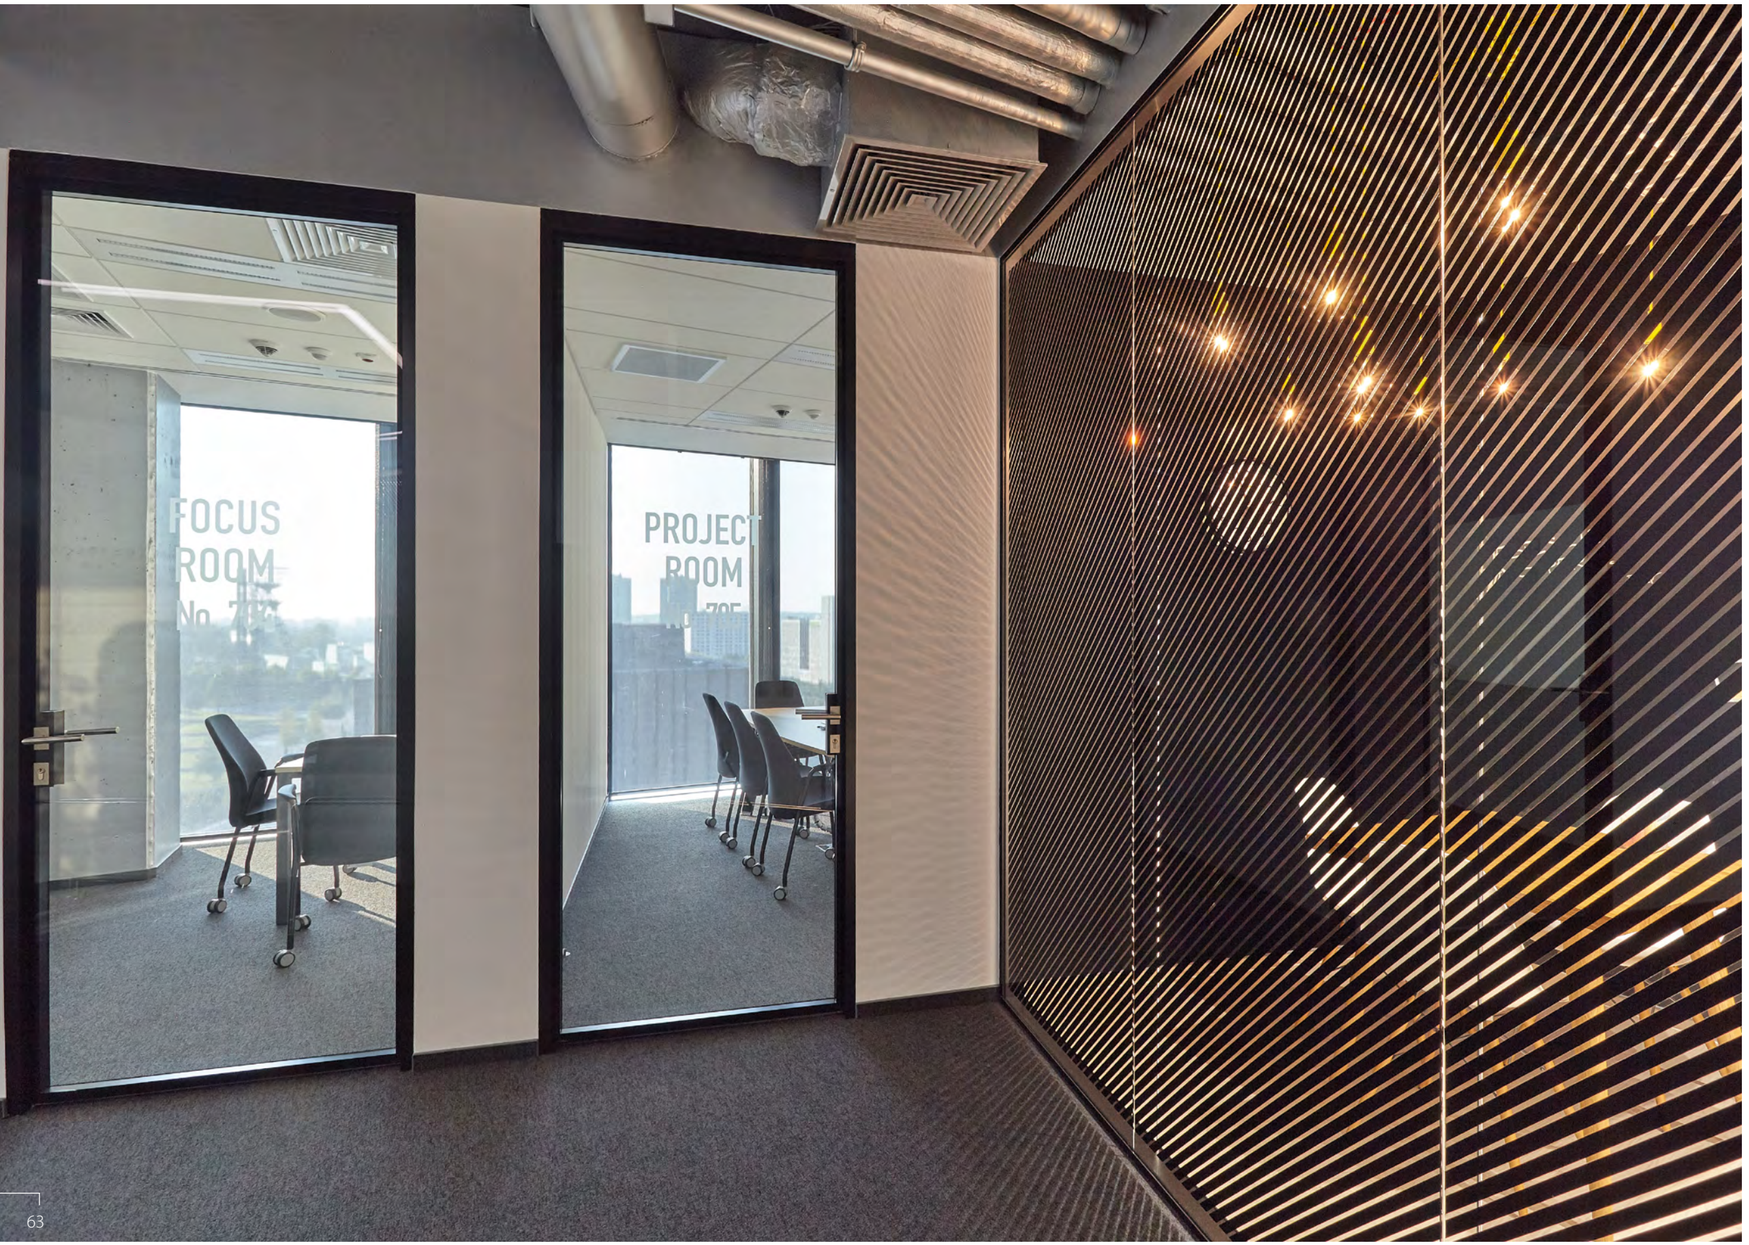

FD53
FLUSH DOOR

Door leaf double glazed with laminated safety glass, glued to the construction made of 40 mm wide profiles. Possibility of fitting a door closer and access control devices. Aluminium doorframe 53 mm, 78 mm, 100 mm thick. Doorframe width: 35 mm, 38 mm, 40 mm

Acoustics

Door types	Glazing	Thickness	Acoustic insulation Rw
Flush door	6 mm ESG + 6mm ESG	6mm + 6 mm	36 dB
Flush door	6 mm ESG/foam 40mm/6 mm ESG	6mm/foam/6mm	41 dB

For all the door, the results listed in the table have been achieved due to use of automatic drop seals.

Vertical section

FLUSH DOOR

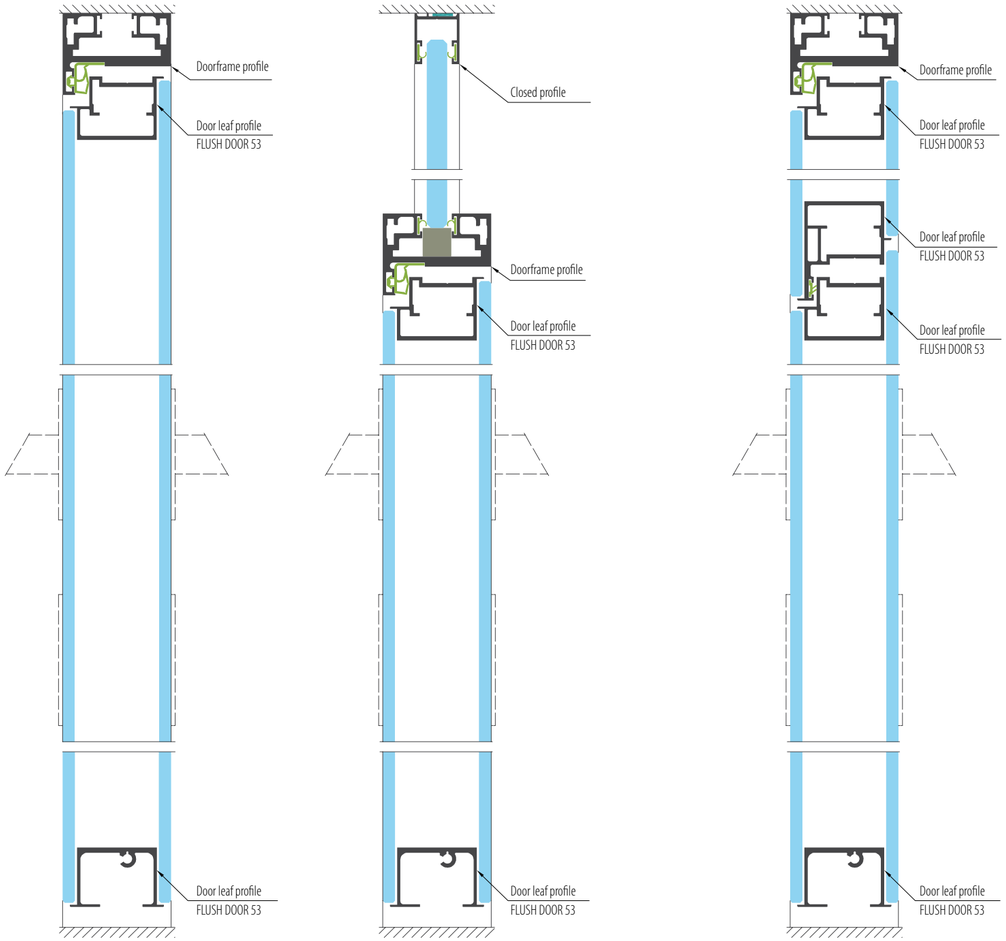

Horizontal section

FLUSH DOOR

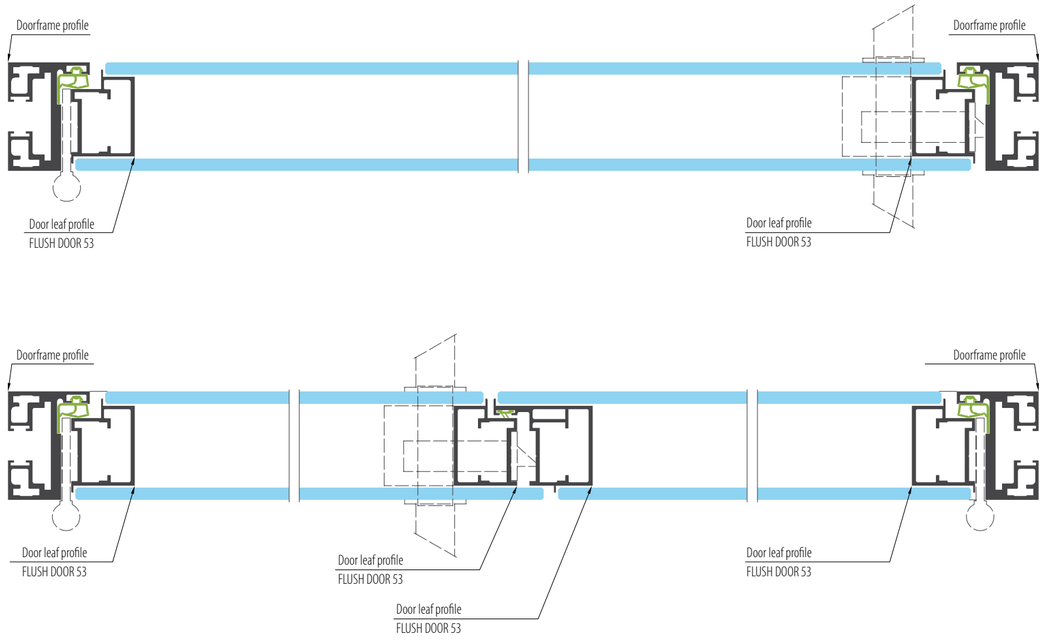

WOODEN DOOR

Wooden, laminated, veneered or painted door leaf. Thickness of the door leaf 40 mm. Aluminium doorframe 53mm, 78 mm or 100 mm thick. Possibility of fitting a door closer and access control devices.

Acoustics

Door types	Thickness	Acoustic insulation Rw
Wooden door	40 mm	32 dB, 37 dB

For all the door, the results listed in the table have been achieved due to use of automatic drop seals.

Vertical section

WOODEN DOOR

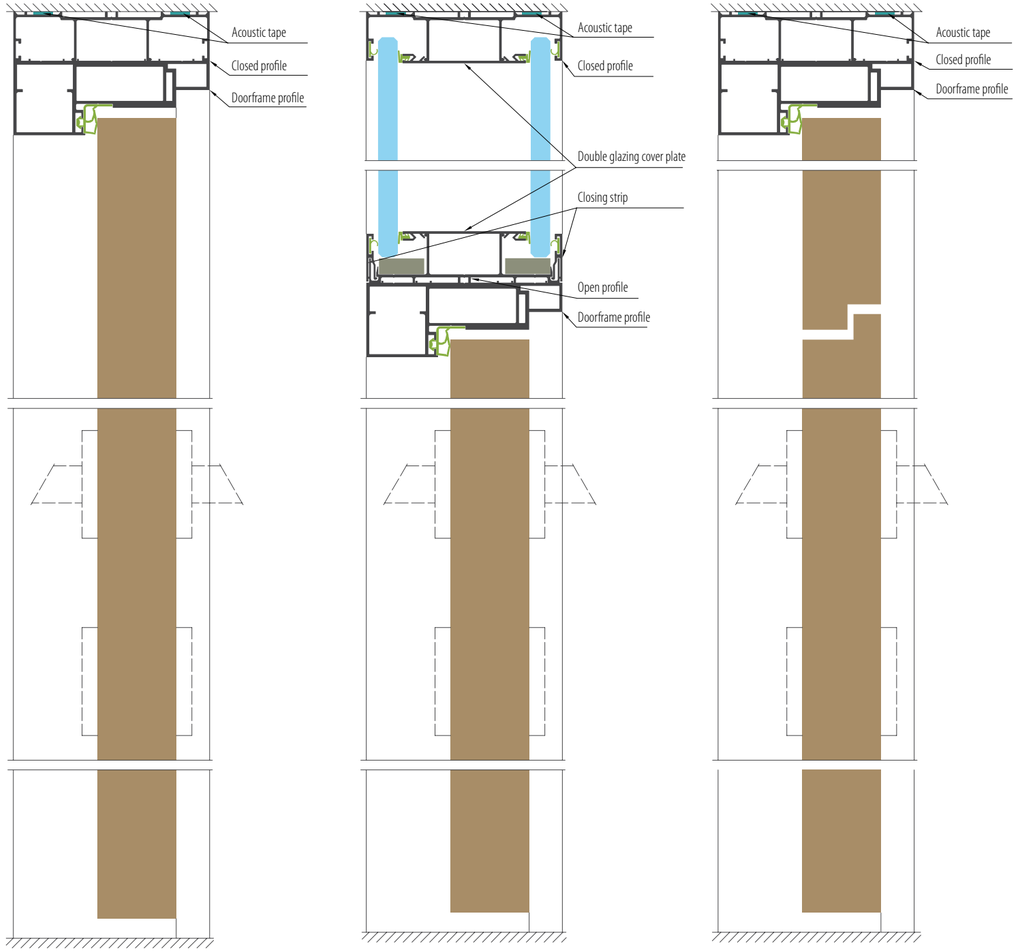

Horizontal section

WOODEN DOOR

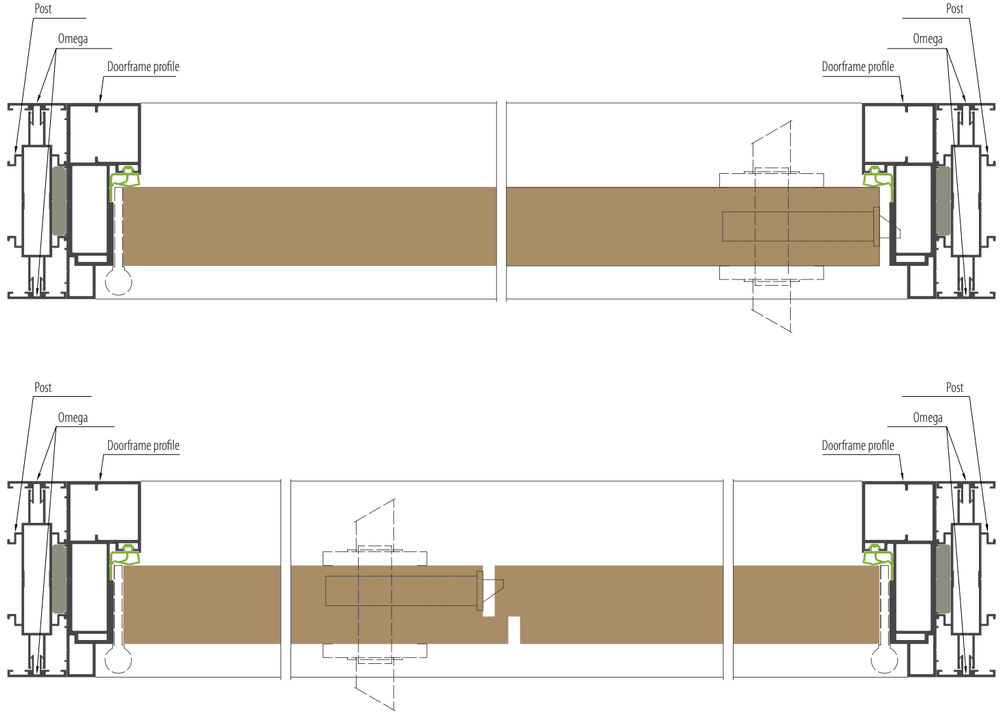

VITRINTEC

SWISS
Planet

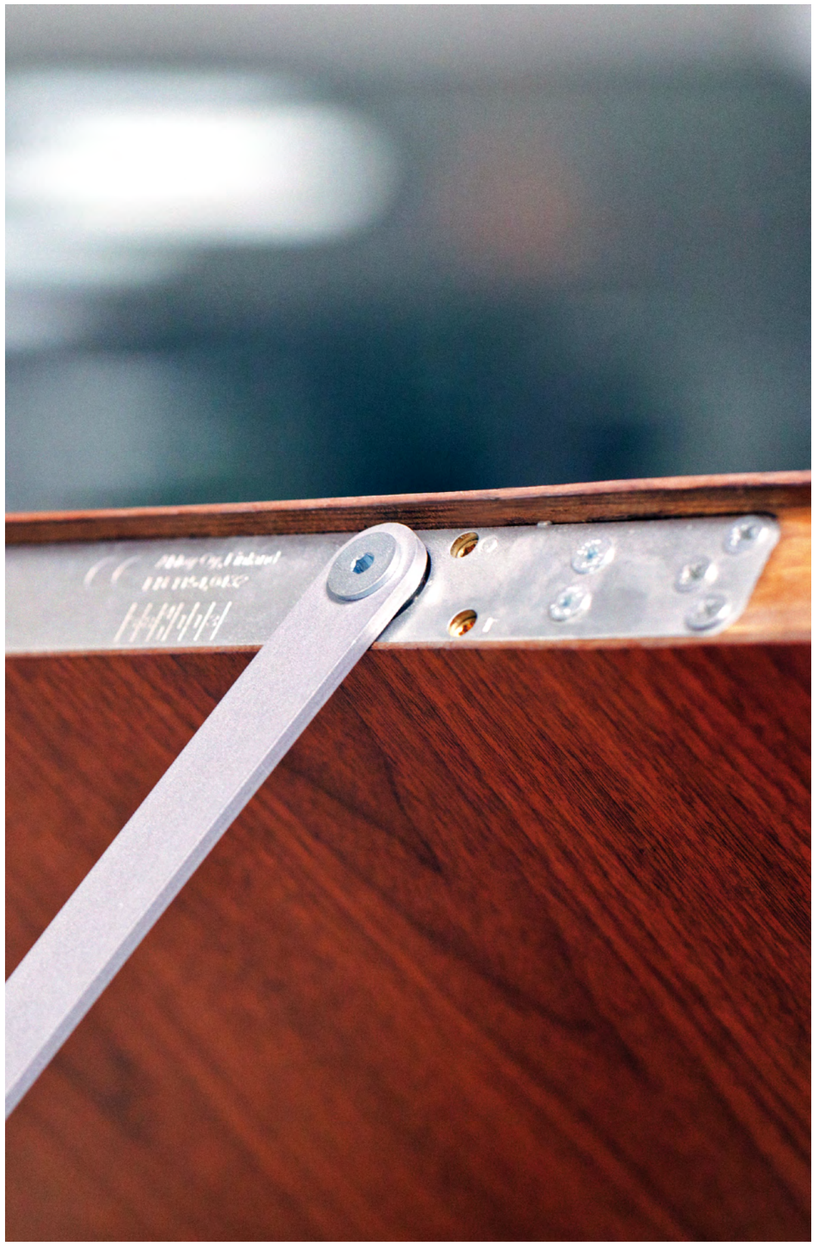

CreoConcept Sp. z o. o. Sp. k.
ul. Karola Olszewskiego 19c
25-663 Kielce, Polonia
tel. 41 278-72-33
NIP: 959-197-28-91

biuro@creoconcept.pl
serwis@creoconcept.pl
www.creoconcept.pl